


Fluid & Air Transfer - Hose

Suction & Discharge

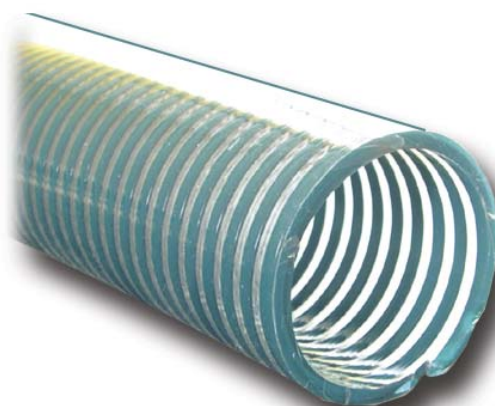

RUBBER WATER SUCTION & DISCHARGE

- Smooth black synthetic rubber
- Abrasion resistant
- Textile reinforced with heavy wire
- Temperature range: -32°C to +82°C

HEAVY DUTY

A heavy duty rubber suction hose for construction quarries & general use.

Suitable for full vacuum.

Product Number	I.D. inches	O.D. inches	Bend Radius Inches	Max W.P. PSI	Approx Wt. Per ft. lbs.
226-04	1	1.38	8	100	0.53
226-05	1-1/4	1.73	10	100	0.75
226-00	1-1/2	1.97	12	100	0.87
226-01	2	2.45	16	100	1.12
226-02	3	3.50	27	100	1.84
226-03	4	4.59	36	75	3.43
226-06	5	5.61	45	75	4.81
RWSD-6	6	6.61	54	75	4.92
RWSD-8	8	8.87	72	75	9.92
RWSD-10	10	11.02	90	75	15.83
RWSD-12	12	13.00	120	75	18.83

PVC SUCTION & DISCHARGE

- Smooth clear PVC
- Excellent weather and abrasion resistance
- Temperature range: -20°C to +70°C

HEAVY DUTY

For construction pumps, septic tank and marine pump out service, mining & quarry use. Suitable for full vacuum. PVC is resistant to some chemicals, acids and alkalis. Reinforced with green PVC helix.

Product Number	I.D. inches	O.D. inches	Vacuum Rating	Bend Radius Inches	Max W.P. PSI	Approx Wt. Per ft. lbs.
227-02	1	1.26	28	3	85	0.26
227-01	1-1/4	1.56	28	4	85	0.35
227-07	1-1/2	1.83	28	5	70	0.48
227-08	2	2.32	28	7	65	0.66
227-25	2-1/2	2.87	28	8	65	0.87
227-09	3	3.43	28	10	65	1.24
227-10	4	4.50	28	15	55	1.85

