


Fluid & Air Transfer

Ventilation Closer

The Ventilation Closer is used in mines to close off air ducts in unused portions of the mine.

- The Ventilation Closer can be installed on active ducting
- Gear motor has 30:1 output ration to provide fluent, speedy opening and closing
- Designed with lifting eyes for easy installation
- Designed with locking pegs to lock onto guide wire for better security

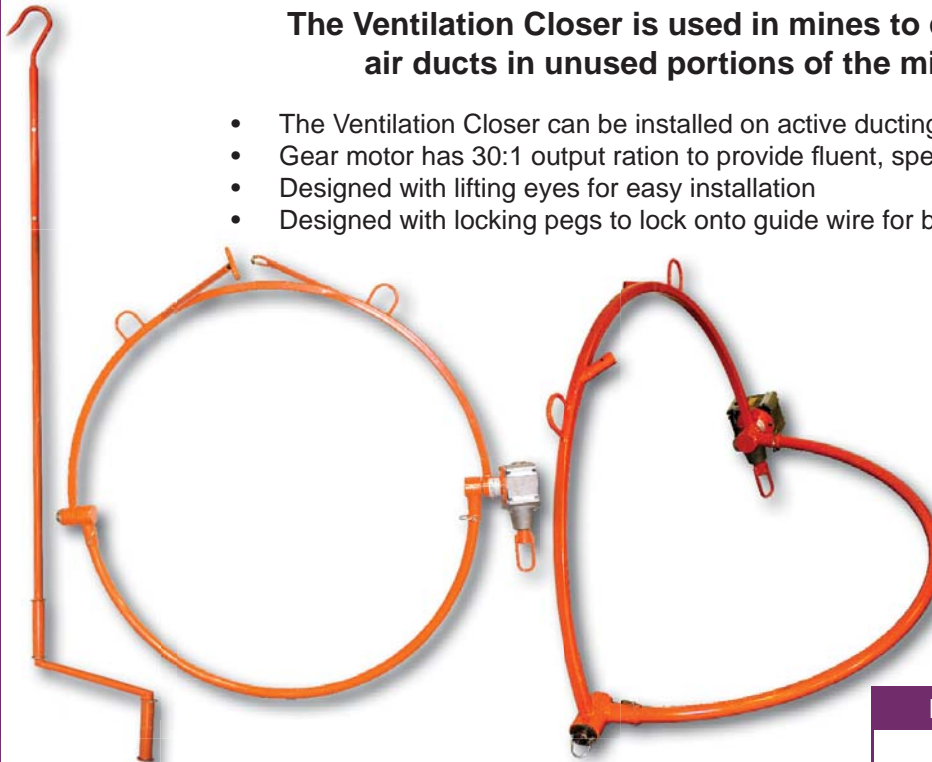

Installed Ventilation Closer



Product Number	Description
47-1015	Ventilation Closer



Blow Tubes

- Available in copper, steel and aluminum
- Available in different lengths and I.D.

Product Number	Size
221-07BT	Blow Tube Copper 1/2" x 12'
221-07BT10C	Blow Tube Copper 1/2" x 10'
221-07BT10S	Blow Tube Steel 1/2" x 10'
221-08BT	Blow Tube Copper 3/4" x 12'
47-1012	Blow Tube Aluminum 1-1/2" x 6'
47-1012X2	Blow Tube Aluminum 2" x 6'
47-1012X3/4	Blow Tube Aluminum 3/4" x 8'



Lubricator is designed for use with rock drill oil or rock drill grease

- Wide throat filler
- Replaceable pipe bushings
- One piece rugged malleable steel
- Weighted sipper
- Straight-through bore design

Product Number	Description
111-00	Lubricator

Lubricator Specifications	
Max Working Pressure	250 psi.
Oil Capacity	1½ pint
Maximum Volume	75-450 cfm
Weight	11.5 lb
Pipe Thread	1¼ inch
Bushing Size	1¼" X 1" and 1¼" X ¾"
Service	Handheld Drills, Small Hoists

