

## Kubota 9.5HP Diesel FMC L09 ASM

Consists of FMC L09-420 Bean pump, 9.5HP Kubota diesel engine with electric start, Noram 6:1 gear reducer, 12V Deep Cell Battery, skid frame, lifting bracket, relief valve, and guards.

### Diesel Engine

Kubota Model OC95-E3

- EPA's strict Tier 4 standards
- Durable Power
- Clean and Quiet Power
- Electric Start

### Gear Reducer

NORAM's 6:1 Reduction Gearbox for one inch crankshaft engines

### Pump

FMC L09-420

See info on L09 pump page

### Specifications:

- Standard Suction Size: 1.50" NPT
- Standard Discharge Size: 1.00" NPT
- Pump Weight (Average): 200 lbs

### Features:

- Fluid end material of cast iron
- Pump can be easily repacked
- Ceramic cylinders
- Internal gear reduction in crankcase eliminates need for large sheaves
- Ball valves are available for pumping viscous materials such as drilling muds



### Kubota Model OC95-E3

Emission Regulation Tier 4

Type 4-cycle Oil-air cooled Diesel

Number of Cylinders 1

Displacement 0.416 (25.39)


Maximum Speed 3600 rpm

Output Net Intermittent - kW: 7.0

HP: 9.4

PS: 9.5

Part Number	Description
39-160-19KBTA	Steel Skid

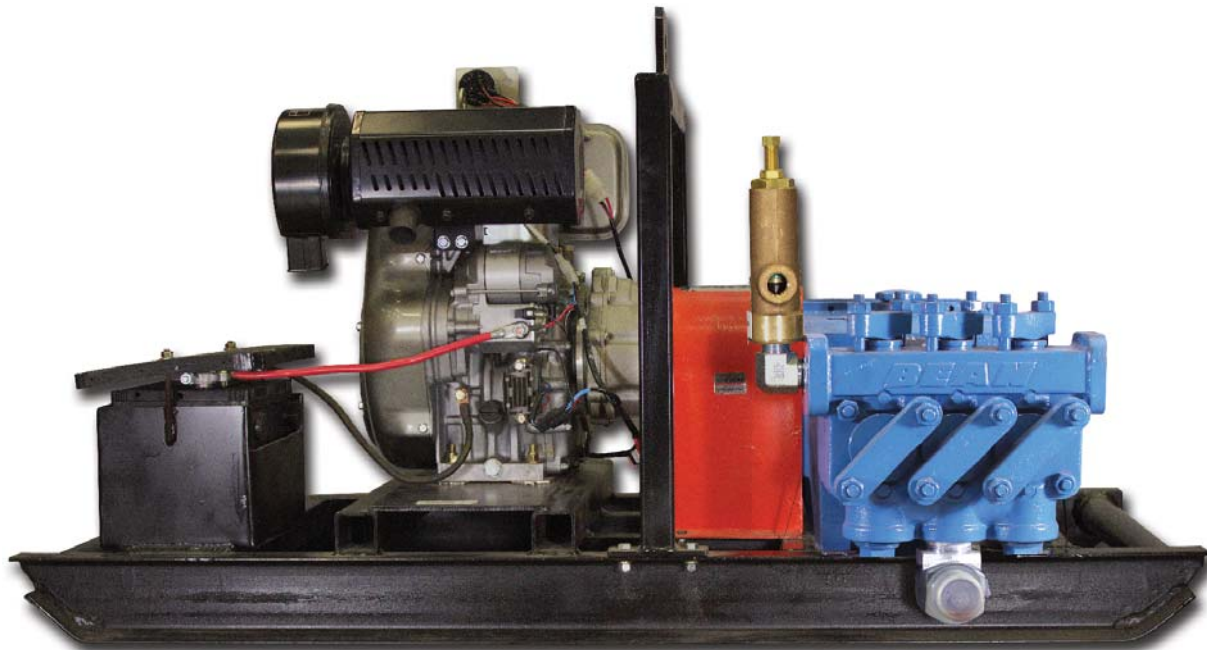

Performance Table FMC L09-420

Pump Model	Piston Diameter (in)	Displacement (GAL/REV)	Max Pressure (PSI)	Pump Capacity (GPM) @ Input Speed (RPM)				
				350 RPM	625 RPM	700 RPM	750 RPM	890 RPM
L0918	2.750	0.0589	700	11.3	20.2	22.6	24.2	28.7

