
Fluid & Air Transfer - Hose

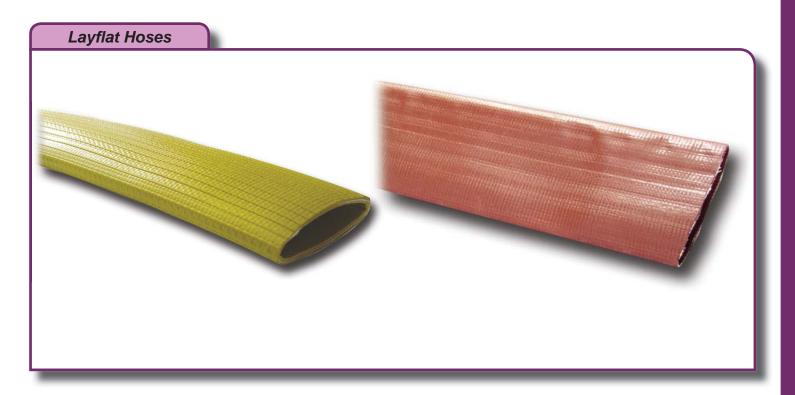

RUBBER LAYFLAT AIR HOSE

An economical EPDM multi-purpose hose used in construction, marine and industrial applications.

- Yellow nitrile tube
- Reinforced with circular woven 100% polyester yarn
- Resistant to abrasion, oil and weathering
- Temperature Range: -30°C to +100°C

| Product Number | I.D. Inches | O.D. inches | Max W.P. PSI | Approx Wt. Per ft. lbs. |
|-------------------|----------------|----------------|--------------|----------------------------|
| 221-153 | 3/4 | 0.98 | 300 | 0.20 |
| 221-225 | 1 | 1.24 | 300 | 0.20 |
| 221-161 | 1-1/2 | 1.74 | 300 | 0.25 |
| 221-100 | 2 | 2.28 | 300 | 0.35 |
| 221-154 | 3 | 3.40 | 250 | 0.52 |
| 221-155 | 4 | 4.29 | 200 | 0.57 |

PVC LAYFLAT HOSE

Hose folds flat for ease of coiling and handling. Designed for use where higher working pressures are required.

- Brown PVC impregnation tube and cover
- Reinforced with woven high tensile synthetic yarn
- Temperature range: -21°C to +54°C

| Product Number | I.D. Inches | O.D. Inches | Max W.P. PSI | Approx Wt. Per ft. lbs. |
|-------------------|----------------|----------------|--------------|----------------------------|
| 227-17 | 1-1/2 | 1.64 | 120 | 0.22 |
| 227-05 | 2 | 2.14 | 115 | 0.29 |
| 227-13 | 3 | 3.17 | 100 | 0.43 |
| 227-14 | 4 | 4.18 | 100 | 0.60 |
| 227-06 | 6 | 6.18 | 80 | 1.01 |





www.timeltd.ca