

# Hoisting & Lifting - Sheave Blocks

## Sheave Blocks

### TIME QUICK OPENING

Manufactured by TIME, the TLB series of sheave blocks are built for hard service under tough underground mining conditions.

To be used only in **straight pull** applications.

#### Features:


- Safety hook releases by turning hook or block through 90°. Hook key holds lock together. No loose parts like toggle pins to get lost.
- Wide throat opening to pass square knots or splices in wire rope.
- Wheel is deeply recessed into side frames to prevent rope fouling.
- Blocks are fitted with sealed high load capacity ball bearings. Dust seals next to bearing increase protection.
- Two bottom shroud bolts ensure rigidity of side frames.

#### 6" Sheave Blocks

- Ductile castings, side frames and wheels.

#### 8" Sheave Blocks

- Medium manganese alloy side frames, heat treated for maximum wear.
- Magnetic qualities.
- Requires no lubrication - sealed ball bearings with extra dust shields

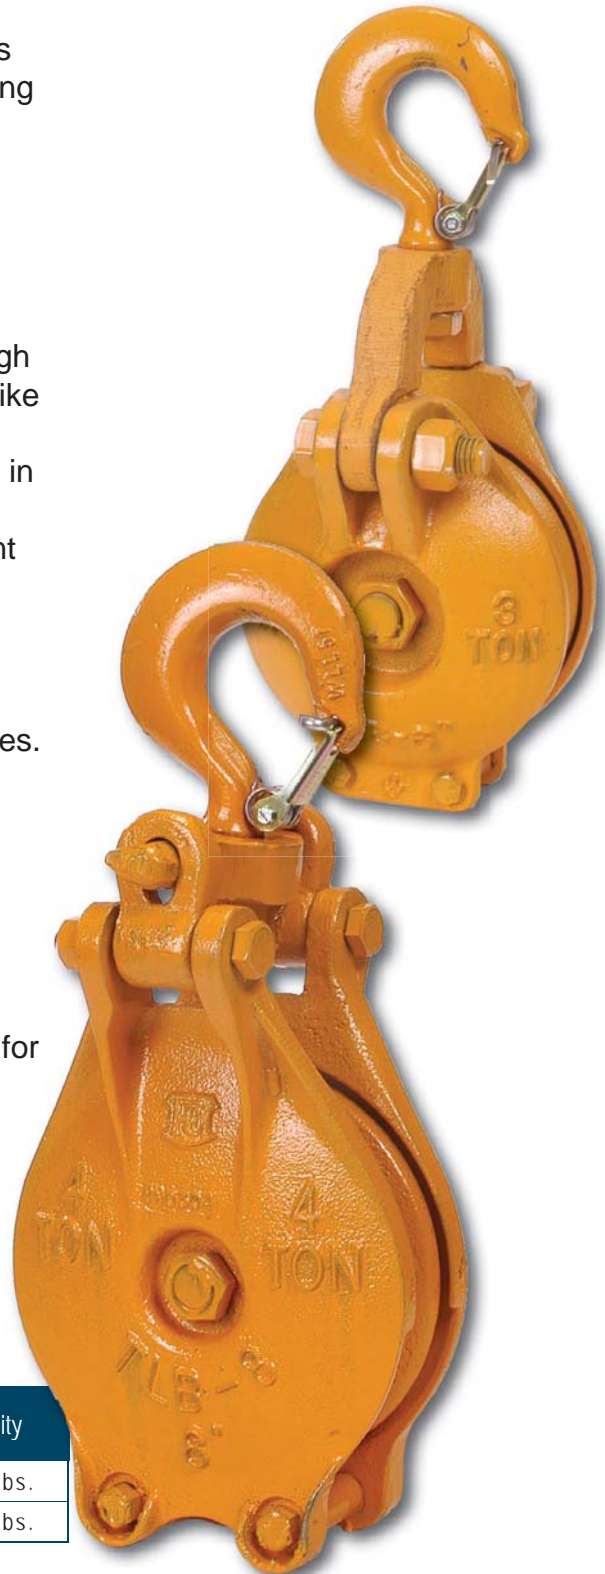

Product Number	Sheave Block	Weight in lbs Hook	Maximum Rope Diameter	Capacity
TLB-6H	6"	20	3/8"	6,000 lbs.
TLB-8H	8"	37	5/8"	8,000 lbs.

