


Layflat Hoses

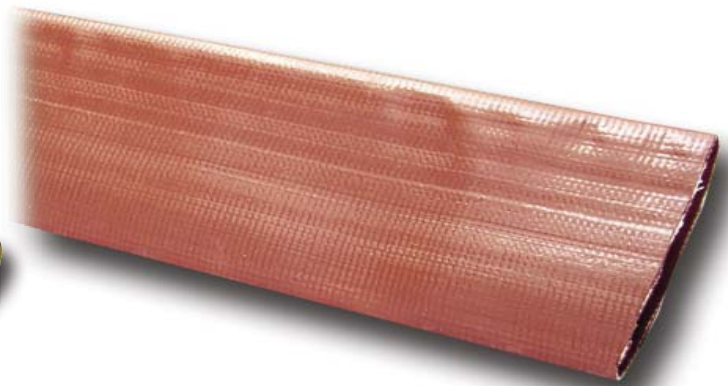

RUBBER LAYFLAT AIR HOSE

An economical EPDM multi-purpose hose used in construction, marine and industrial applications.

- Yellow nitrile tube
- Reinforced with circular woven 100% polyester yarn
- Resistant to abrasion, oil and weathering
- Temperature Range: -30°C to +100°C

Product Number	I.D. Inches	O.D. inches	Max W.P. PSI	Approx Wt. Per ft. lbs.
221-153	3/4	0.98	300	0.20
221-225	1	1.24	300	0.20
221-161	1-1/2	1.74	300	0.25
221-100	2	2.28	300	0.35
221-154	3	3.40	250	0.52
221-155	4	4.29	200	0.57

PVC LAYFLAT HOSE

Hose folds flat for ease of coiling and handling. Designed for use where higher working pressures are required.

- Brown PVC impregnation tube and cover
- Reinforced with woven high tensile synthetic yarn
- Temperature range: -21°C to +54°C

Product Number	I.D. Inches	O.D. Inches	Max W.P. PSI	Approx Wt. Per ft. lbs.
227-17	1-1/2	1.64	120	0.22
227-05	2	2.14	115	0.29
227-13	3	3.17	100	0.43
227-14	4	4.18	100	0.60
227-06	6	6.18	80	1.01

